


## SPECIFICATION SHEET

# CARAMEL NARROW

Item code: PROJBL005

Collection: Project

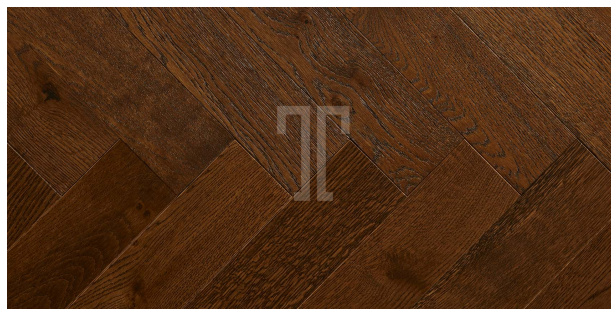

| Overview                    |   |
|-----------------------------|---|
| Wood Species                | European Oak  |
| Design                      | Herringbone   |
| Grade                       | Nature  |
| Profile                     | Groove to three sides   |
| Edge Detail                 | Micro bevelled  |
| Construction                | 2 Ply Engineered  |
| Wear Layer                  | 3mm Hardwood (Nominal)  |
| Application Guide           | Floors & walls  |
| Dimensions                  |   |
| Width                       | 90mm  |
| Thickness                   | 14mm  |
| Length                      | 450mm   |
| Tolerance                   | +/- 0.25mm / 95% in tolerance   |
| Pack Size, M2               | 1.296 m2 - order to the nearest pack size                               |
| Finish                      |   |
| Finish                      | Hardened Oil  |
| Surface Texture             | Medium brushed  |
| Tone                        | Dark Tone   |
| Tonal Variation             | Medium natural tonal variation  |
| Batch Variation             | Not advised to mix batches in one floor area                            |
| Handover guidance           | Fully finished, ready for use.  |
| Floor Care                  | Care System 1   |
| Environmental Certification |   |
| Certification               | FSC 100% - independently audited, since 1997, chain of custody tracking |
| UKTR Compliant              | Yes   |
| Installation Guidelines     |   |
| Floating Installation       | No  |
| Secret Nail                 | No  |
| Structural Floor            | No  |

| Fully Bond                            | Yes - Ted Todd MS Flex high strength adhesive                           |
|---------------------------------------|---|
| Sub floor Primer                      | Yes - Ted Todd Primerfast   |
| Underfloor Heating                    | Yes - please see usage guidelines                                       |
| Sub Floors                            |   |
| Concrete                              | Dry, Flat   |
| Plywood                               | Yes   |
| Screed                                | Dry, flat, with Primerfast moisture barrier                             |
| Formed Tread + Riser                  | Yes - Made to order - 14 day service                                    |
| L Section, T Section, Reducer, Scotia | Yes - 7 day service   |
| Skirting, Architrave                  | Yes by request  |
| Technical Information                 |   |
| Moisture Content                      | 8-12% fair and average moisture content                                 |
| Slip Rating                           | Low risk dry. Low risk wet.   |
| EN 13501-1 Fire Rating Flooring       | Efl   |
| EN 14342 Emissions                    | E1  |
| Humidity requirements                 | Between 40 and 60% relative humidity                                    |
| Origin                                | European  |
| Janka Hardness Rating                 | 1,120 lbf (4980N)   |
| Formaldehyde Emission                 | E1  |
| Thermal Conductivity                  | 15mm 0.08m2K/W, 0.8 Tog   |
| Shipping Information                  |   |
| Shipment times                        | Largest UK Stocks - available 3 day service                             |
| Packaging                             | Palletised, wrapped + banded  |
| Warranty                              |   |
| Warranty                              | 30 year product warranty  |
| Life Cycle                            |   |
| Life Span                             | Generational life span if cared for                                     |
| Recycle                               | Value in recycling into upscale uses, worst case outcome carbon neutral |
| Reuse                                 | Reclaim and re-use as flooring  |