


TED TODD

SPECIFICATION SHEET

OLLERTON WIDE PLANK

Item code: PROJ027 Collection: Project

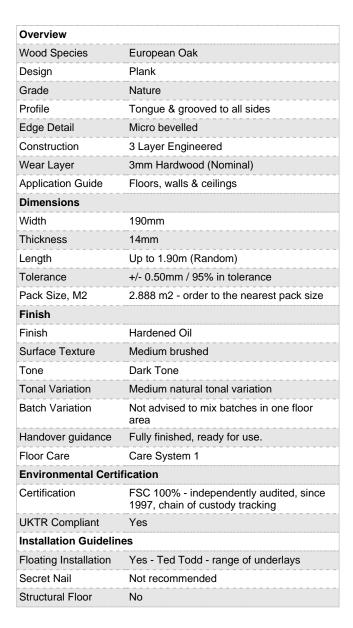



Fully Bond	Yes - Ted Todd MS Flex high strength adhesive
Sub floor Primer	Yes - Ted Todd Primerfast
Underfloor Heating	Yes - please see usage guidelines
Sub Floors	
Concrete	Dry, Flat
Plywood	Yes
Screed	Dry, flat, with Primerfast moisture barrier
Formed Tread + Riser	Yes - Made to order - 14 day service
L Section, T Section, Reducer, Scotia	Yes - 7 day service
Skirting, Architrave	Yes by request
Technical Information	
Moisture Content	8-12% fair and average moisure content
Slip Rating	Low risk dry. Low risk wet.
EN 13501-1 Fire Rating Flooring	Efl
EN 14342 Emissions	E1
Humidity requirements	Between 40 and 60% relative humidity
Origin	European
Janka Hardness Rating	1,120 lbf (4980N)
Formaldehyde Emission	E1
Thermal Conductivity	15mm 0.08m2K/W, 0.8 Tog
Shipping Information	
Shipment times	Largest UK Stocks - available 3 day service
Packaging	Palletised, wrapped + banded
Guarantee	
Warranty	30 year product warranty
Life Cycle	
Life Span	Generational life span if cared for
Recycle	Value in recycling into upscale uses, worst case outcome carbon neutral
Reuse	Reclaim and re-use as flooring









